

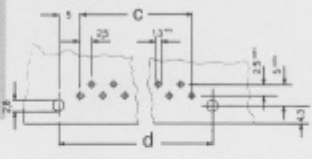


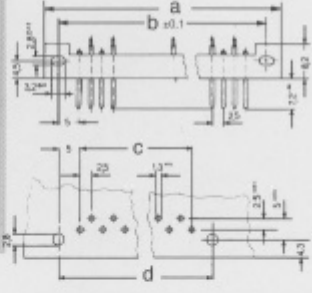

CONNECTOR TYPE DIN 41617 - MALE SOLDERING & PCB Pitch 2,5

Connettori serie DIN 41617
Connectors DIN 41617

Maschio c.s. passo 2,5
Male connector for printed circuits centre spacing

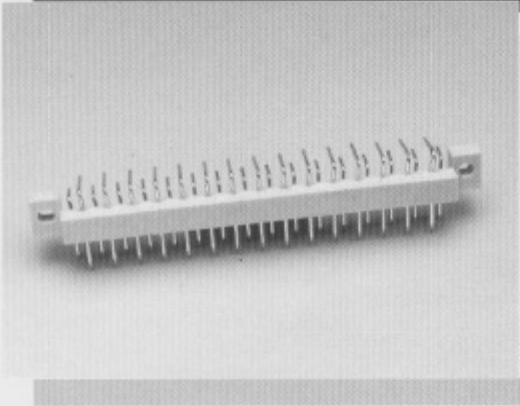

Dima di foratura
Master plate


Codice <i>Code</i>	N. Pini <i>Pins</i>	Tolleranze (tolerance) $\pm 0,2$			
		a	b	c	d
2513.1	13	45,8	40	12 x 2,5 = 30	40
2521.1	21	65,8	60	20 x 2,5 = 50	60
2531.1	31	90,8	85	30 x 2,5 = 75	85




CONNECTOR TYPE DIN 41617 - MALE
 SOLDERING & PCB
 Pitch 2,54

Connettori serie DIN 41617
 Connectors DIN 41617

Maschio c.s. passo 2,54
Male connector for printed circuits centre spacing

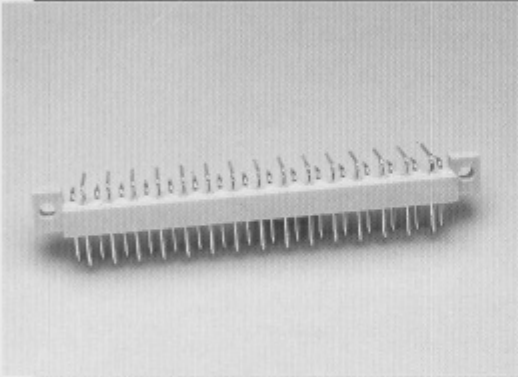

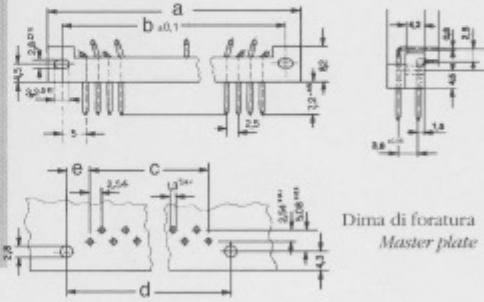

Dima di foratura
Master plate

Codice <i>Code</i>	N. Poli <i>Pins</i>	Tolleranze (Adherence) ± 0,2				
		a	b	c	d	e
2521.1.4	21	65,8	60	20 x 2,54 = 50,8	60	4,6
2531.1.4	31	90,8	85	30 x 2,54 = 76,2	85	4,4